




# ISO 4014, 8765, 4016

ersetzt DIN 931, 960, 601

Sechskantschrauben mit Schaft  
ISO 8765/DIN 960 mit Feingewinde

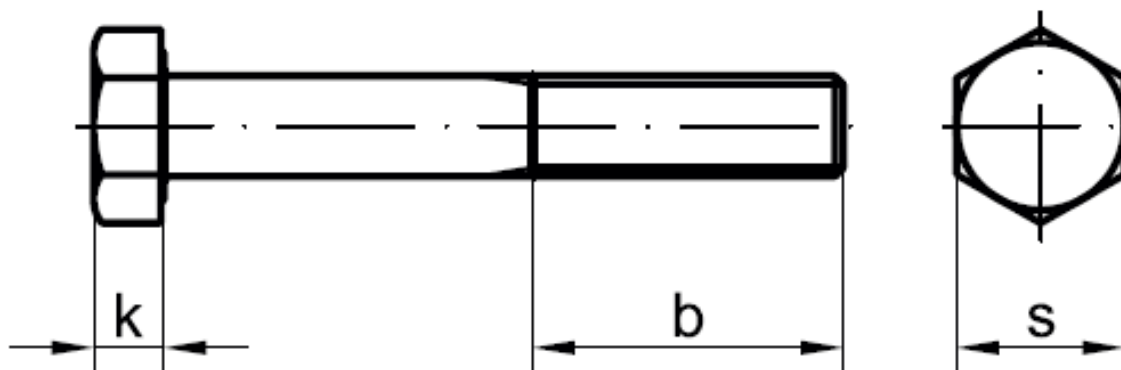

b1 für  $l \leq 125$  mm  
b2 für  $l \leq 200$  mm  
b3 für  $l > 200$  mm

Maße	M 2	M 3	M 4	M 5	M 6	M 7	M 8	M 10	M 12
$s_{ISO/DIN}$	4	5,5	7	8	10	11	13	16/17	18/19
k	1,4	2	2,8	3,5	4	4,8	5,3	6,4	7,5
b <sup>1</sup>	10	12	14	16	18	20	22	26	30
b <sup>2</sup>	-	-	-	22	24	26	28	32	36
b <sup>3</sup>	-	-	-	-	-	-	-	45	49

Maße	M 14	M 16	M 18	M 20	M 22	M 24	M 27	M 30	M 33
$s_{ISO/DIN}$	21/22	24	27	30	34/32	36	41	46	50
k	8,8	10	11,5	12,5	14	15	17	18,7	21
b <sup>1</sup>	34	38	42	46	50	54	60	66	72
b <sup>2</sup>	40	44	48	52	56	60	66	72	78
b <sup>3</sup>	53	57	61	65	69	73	79	85	91

Maße	M 36	M 39	M 42	M 45	M 48	M 52	M 56	M 64	
$s_{ISO/DIN}$	55	60	65	70	75	80	85	95	
k	22,5	25	26	28	30	33	35	40	
b <sup>1</sup>	78	84	90	96	102	-	-	-	
b <sup>2</sup>	84	90	96	102	108	116	124	140	
b <sup>3</sup>	97	103	109	115	121	129	137	153	

