




# DIN 938, 939

## Stiftschrauben

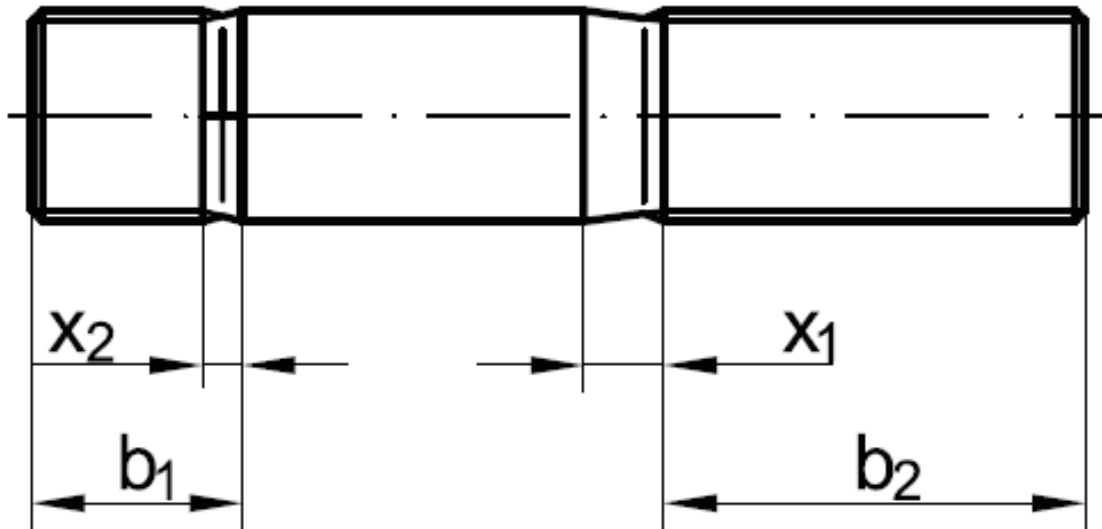

$b_1$  = Einschraubende  
 $b_2$  = Mutterende

$b^1$  für  $l \leq 125$  mm  
 $b^2$  für  $l \leq 200$  mm  
 $b^3$  für  $l > 200$  mm

DIN 938 = mit Einschraubende  $\approx 1 d$   
DIN 939 = mit Einschraubende  $\approx 1,25 d$

Maße	M 5	M 6	M 8	M 10	M 12	M 14
$b_1$ (DIN 938)	5	6	8	10	12	14
$b_1$ (DIN 939)	6,5	7,5	10	12	15	18
$x_1$	2	2,5	3,2	3,8	4,3	5
$x_2$	1	1,25	1,6	1,9	2,2	2,5
$b_2^1$	16	18	22	26	30	34
$b_2^2$	22	24	28	32	36	40
$b_2^3$	-	-	-	45	49	53

Maße	M 16	M 20	M 24	M 27	M 30
$b_1$ (DIN 938)	16	20	24	27	30
$b_1$ (DIN 939)	20	25	30	35	38
$x_1$	5	6,3	7,5	7,5	9
$x_2$	2,5	3,2	3,8	3,8	4,5
$b_2^1$	38	46	54	60	66
$b_2^2$	44	53	60	66	72
$b_2^3$	57	65	73	79	85

